

Be**STONE**

Be**TON**



Dress Your Home

Pavimento

Bestone



Bestone





V3



PEI 5

Bestone

Gres Porcellanato / Porcelain stoneware / Grès cérame / Feinsteinzeug



8,5 mm

NAT / R9 + R11

30X60

IVORY



30x60 BE IVORY
BE100 / NAT / R9

60




30x60 BE IVORY
BE200 / NAT / GRIP R11

60

Mosaico (30x30)

su rete
(Mesh mounted)



11 pz

5x5 MOS. BE IVORY
BE202 / RET / GRIP

18

MUD




30x60 BE MUD
BE500 / NAT / R9

60



30x60 BE MUD
BE600 / NAT / GRIP R11

60




11 pz

5x5 MOS. BE MUD
BE602 / RET / GRIP


18

ICE

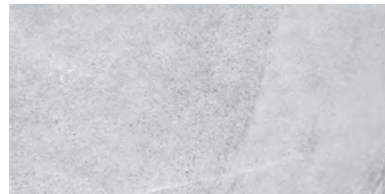


30x60 BE ICE
BE300 / NAT / R9

60

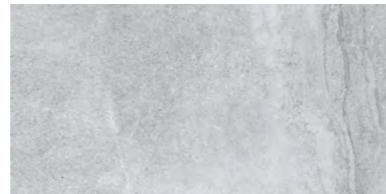

30x60 BE ICE
BE400 / NAT / GRIP R11

60



11 pz

5x5 MOS. BE ICE
BE402 / RET / GRIP

18

GREY




30x60 BE GREY
BE700 / NAT / R9

60



30x60 BE GREY
BE800 / NAT / GRIP R11

60



11 pz

5x5 MOS. BE GREY
BE802 / RET / GRIP

18

Skirting Battiscopa



10



30 pz

Battiscopa
7,2x30

BE109 BATT. BE IVORY
BE309 BATT. BE ICE
BE509 BATT. BE MUD
BE709 BATT. BE GREY

FORMATO Size	SPESSORE Thickness	SCATOLE Boxes	PALETTE Pallets				
cm	mm	pcs	m ²	kg	box	m ²	kg
30x60 NAT R9	8,5	6	1,08	19,10	48	51,84	916,8
30x60 GRIP R11	8,5	6	1,08	19,10	48	51,84	916,8

Imballi / Pesì
[Packaging / Weights]



FLOOR / Bestone Be MUD

Beton





V3



PEI 4

Beton

Gres Porcellanato / Porcelain stoneware / Grès cérame / Feinsteinzeug



8,5 mm

NAT / R9 + R11

30X60




NATURALE

LIGHT GREY



30x60 LIGHT GREY
BE010 / NAT / R9
BE020 / NAT / GRIP R11

60

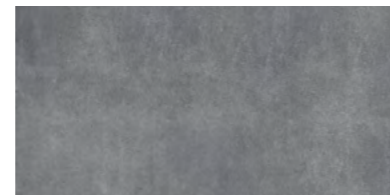

30x60 FUMO
BE070 / NAT / R9
BE080 / NAT / GRIP R11

60

FUMO

Skirting
Battiscopa



Battiscopa
7,2x30


10

30 pz

BE079 BATT. LIGHT GREY
BE019 BATT. FUMO

FORMATO Size	SPESSORE Thickness	SCATOLE Boxes			PALETTE Pallets		
		pcs	m ²	kg	box	m ²	kg
30x60 NAT R9	8,5	6	1,08	19,10	48	51,84	916,8
30x60 GRIP R11	8,5	6	1,08	19,10	48	51,84	916,8

Imballi / Pesì
[Packaging / Weights]

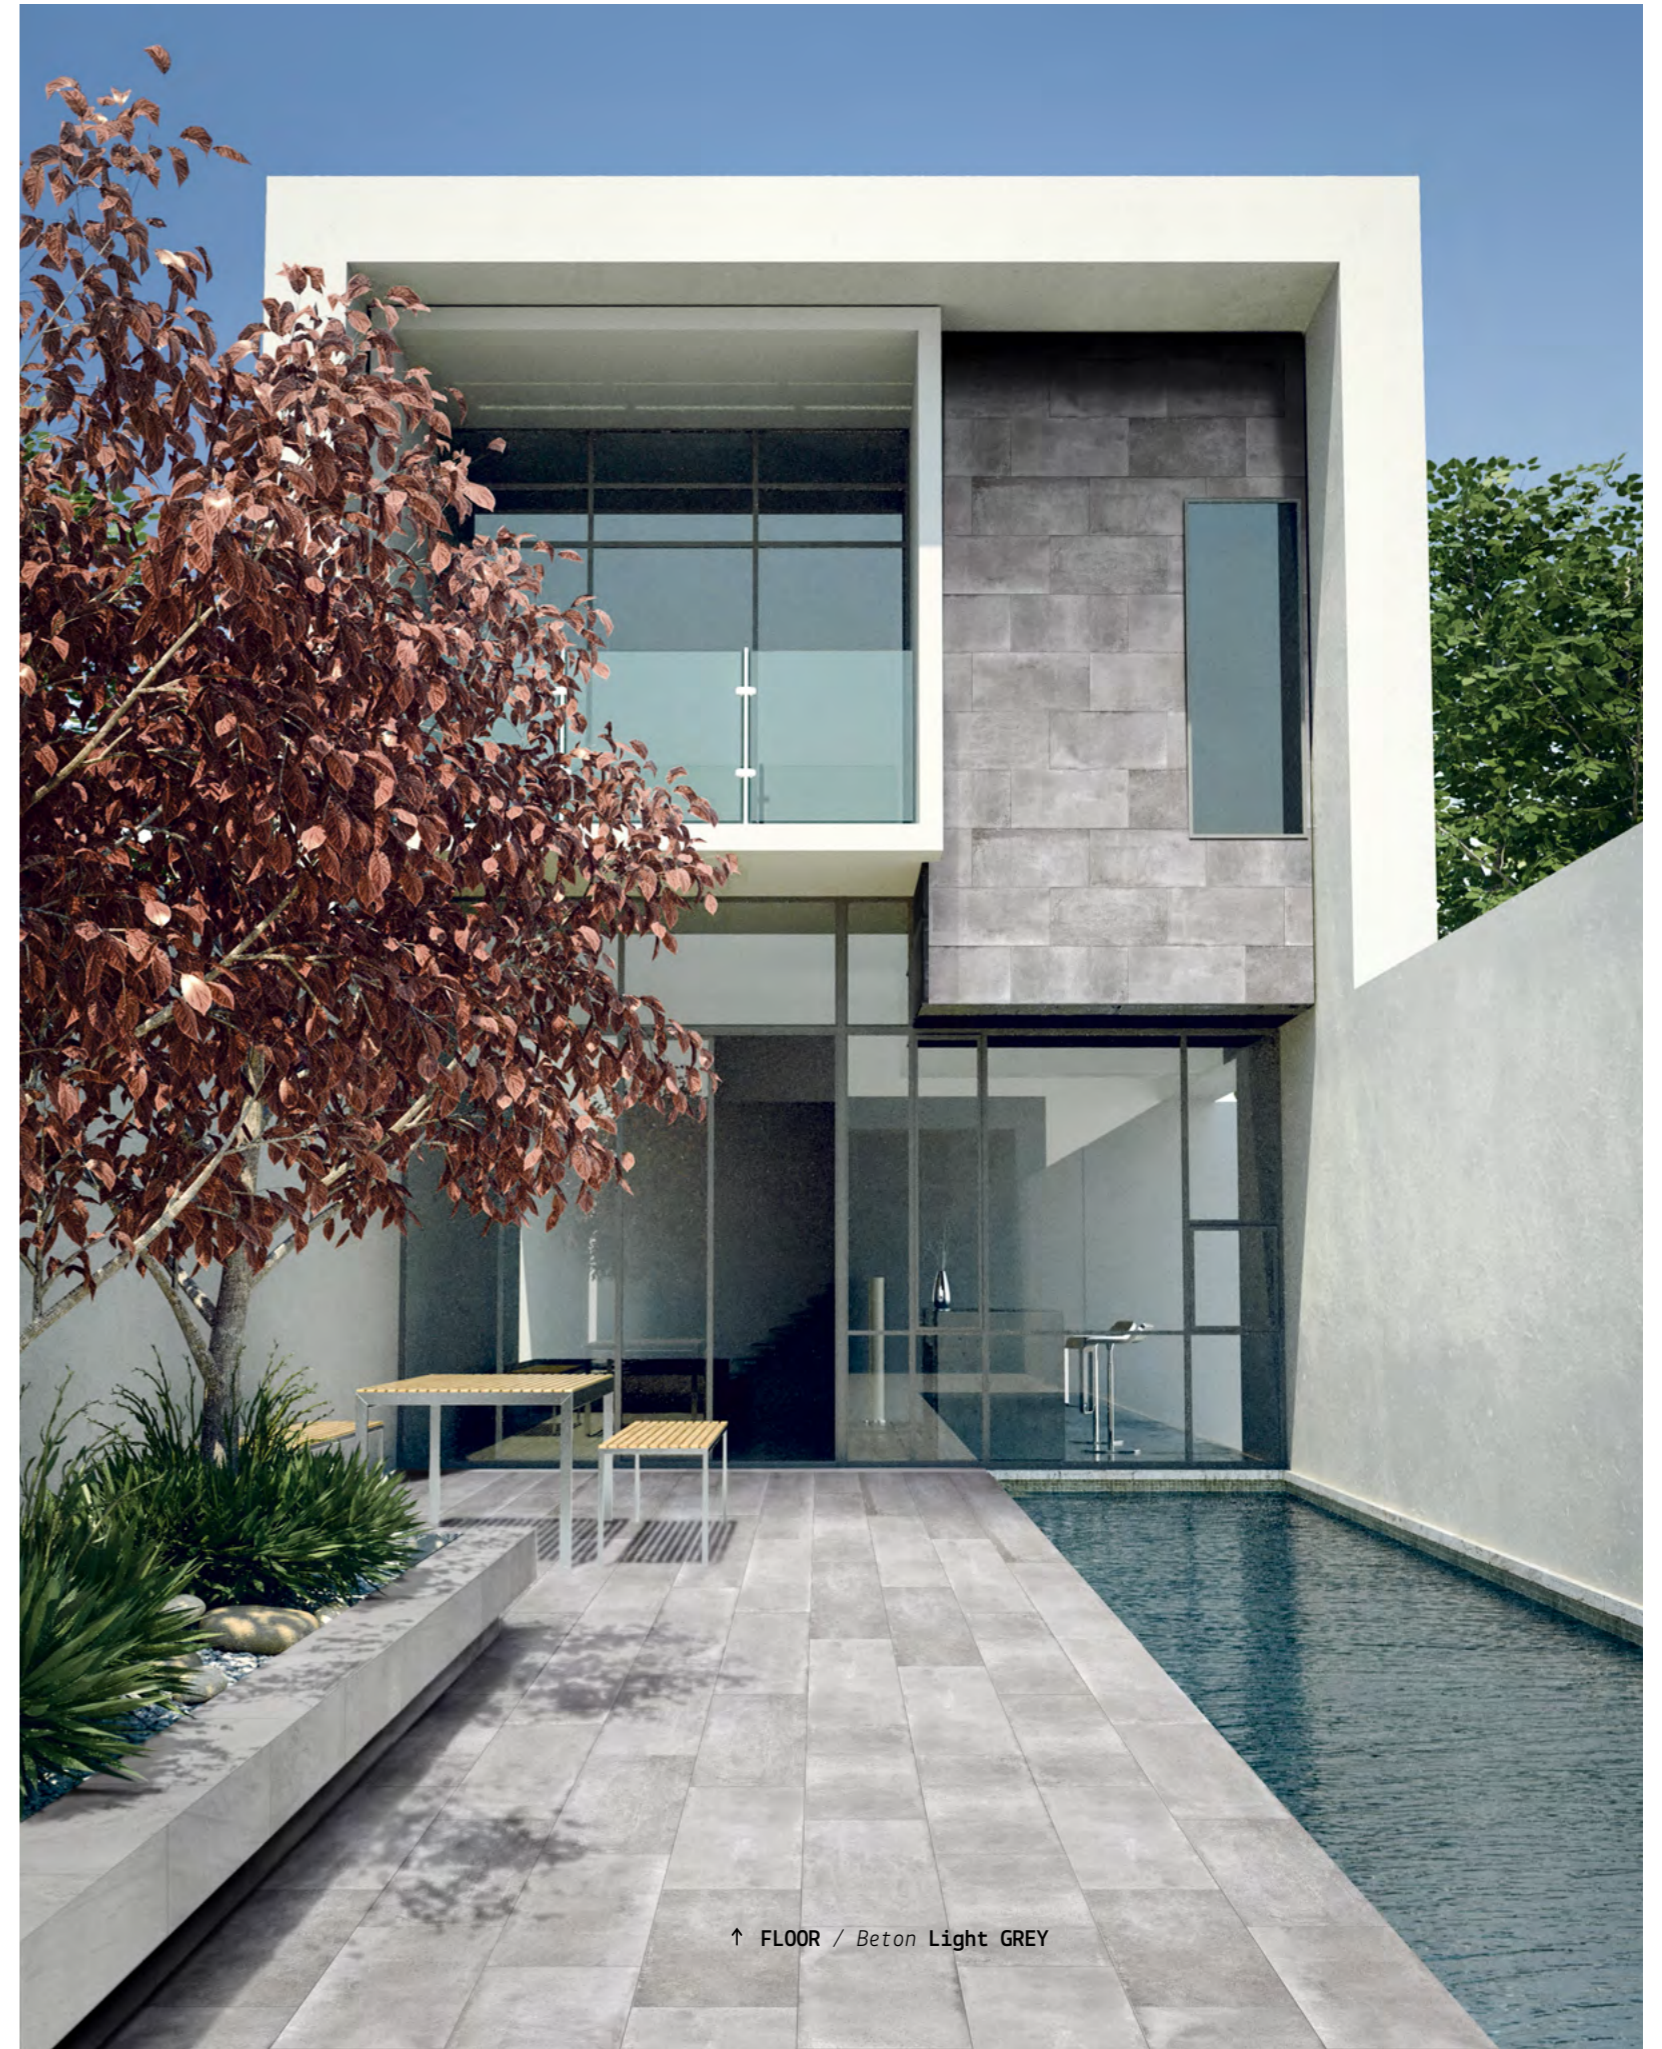

↑ FLOOR / Beton Light GREY

CARATTERISTICHE TECNICHE

Technical features
Caractéristiques techniques
Technische Eigenschaften

PAVIMENTO

Floor tile

RIVESTIMENTO

Wall tile



Azienda
Company



idea ceramica // by MoMa ceramiche Group

	Metodo di prova Testing method Méthode d'essai Prüfmethode	Valori prescritti International Standard Internationale Normwerte Valeurs Prescrites	Valori prescritti International Standard Internationale Normwerte Valeurs Prescrites	Valori medi Average Value Mittelwert Valeurs Moyennes
Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme	ISO 10545 - 3	≤ 0,5 %	> 10 %	Conforme In accordance Entsprechend
Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	Conforme In accordance Entsprechend
Spessore Thickness Épaisseur Stärke	ISO 10545 - 2	+/- 5 %	+/- 10 %	Conforme In accordance Entsprechend
Rettilineità degli spigoli Straightness Équerage des angles Geradlinigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,3 %	Conforme In accordance Entsprechend
Ortogonalità Rectangularity Orthogonalité Rechtwinkligkeit	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	Conforme In accordance Entsprechend
Planarità Warpage Planéité Ebenflächigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,5 % - 0,3%	Conforme In accordance Entsprechend
Coefficiente di attrito (scivolosità) Friction coefficient (slipperiness) Coefficient de friction (glissement) Reibungskoeffizient (Schlupfrigkeit)				
Coefficiente dilatazione termica lineare Coefficient of linear thermal-expansion Coefficient de dilatation thermique linéaire Lineare Wärmeausdehnung	ISO 10545 - 8	9 MK ¹		7 MK¹
Resistenza alla flessione Flexion resistance Résistance à la flexion Biegezugfestigkeit	ISO 10545 - 4	> 35 N/mm ²	> 15 N/mm ²	Conforme In accordance Entsprechend
Resistenza all'abrasione profonda Deep abrasion resistance Résistance à l'abrasion profonde Beständigkeit gegen Tiefenabrieb				
Resistenza al gelo Frost resistance Résistance au gel Frostwiderstandsfähigkeit	ISO 10545 - 12	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
Resistenza agli sbalzi termici Thermal shock resistance Résistance aux écarts de température Temperaturwechselbeständigkeit	ISO 10545 - 9	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
Resistenza dei colori alla luce Color resistance to light Résistance de la couleur à la lumière Lichtbeständigkeit	DIN 51094	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
Resistenza ai prodotti chimici Chemical resistance Résistance aux produits chimiques Chemikalienfestigkeit	ISO 10545 - 13	Classe UB min	Classe GB min	Conforme In accordance Entsprechend
Resistenza alle macchie Stain resistance Résistance aux taches Flecken-Beständigkeit	ISO 10545 - 14	Classe 3 min	Classe 3 min	Conforme In accordance Entsprechend

UNI EN 14411 G
Gruppo BIa GL

UNI EN 14411 L
Gruppo BIII GL

Pavimenti in gres porcellanato
Porcelain wall and floor tiles

Rivestimenti in bicottura
Double firing wall tiles



We are here!
Noi siamo qui!

Finale Emila (MO) - Via Panaria Bassa 17/A - Italy

Tel. +39 0535 90401 / info@ideaceramica.biz

www.ideaceramica.net

A detailed botanical illustration of various tropical plants, including large palm-like leaves with prominent veins and clusters of small, light-colored flowers. The style is reminiscent of a scientific or artistic study, with fine lines and a muted color palette of greens, browns, and greys.

idea ceramica

Via Panaria Bassa 17/A
41034 Finale Emilia (MO)

Tel. +39 0535 90401
Fax. +39 0535 762368

MADE IN ITALY

info@ideaceramica.biz

www.ideaceramica.net