

# EverGreen

idea  
ceramica

Dress Your Home

Rivestimento






# EVERGREEN

Bicottura tradizionale  
 Traditional double fired  
 Bi-cuisson traditionnelle  
 Zweibrandfliesen

Monocalibro / Monocaliber / Monocalibre / In einem werkmass



25x60  
 10"x24"

## Size Formato

Cm 25x60

FONDI 25x60

EVERBRICK 25x60

LIST. EVER 4,5x60

LIST. BRICK 4,8x60

STICK 1x60

## SCATOLE Boxes



Pz

m<sup>2</sup>

Kg

## PALETTE Pallets



Box

m<sup>2</sup>

Kg

	Pz	m <sup>2</sup>	Kg	Box	m <sup>2</sup>	Kg
FONDI 25x60	9	1,35	19,18	48	64,80	920,48
EVERBRICK 25x60	9	1,35	19,18	48	64,80	920,48
LIST. EVER 4,5x60	8	-	3,30	-	-	-
LIST. BRICK 4,8x60	8	-	3,30	-	-	-
STICK 1x60	8	-	0,70	-	-	-

Imballi / Pesi  
 [Packaging / Weights]





Everbrick Smoke


Smoke + Ice





# Evergreen

9 mm

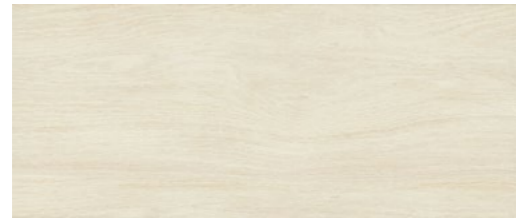


EVG950 EVERGREEN CREAM / 25x60 █ 56



EVG700 EVERGREEN HONEY / 25x60 █ 56



EVG710 EVERBRICK HONEY / 25x60 █ 63

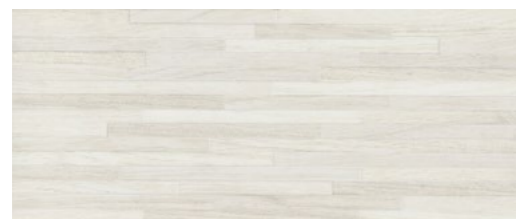

EVG610 EVERBRICK ICE / 25x60 █ 63



EVG810 EVERBRICK SMOKE / 25x60 █ 63



EVG600 EVERGREEN ICE / 25x60 █ 56



EVG800 EVERGREEN SMOKE / 25x60 █ 56



EVG901 LIST.EVER SMOKE / 4,5x60 █ 29




EVG601 LIST.EVER HONEY / 4,5x60 █ 29



EVG951 LIST.BRICK SMOKE / 4,8x60 █ 29



EVG851 LIST.BRICK HONEY / 4,8x60 █ 29

Matching Stick: 1x60 █ 26  8 pz.

UR003\_Stick Rosso

UR002\_Stick Bordeaux

UR006\_Stick Black

UR010\_Stick Dark Brown

UR001\_Stick Argento



Everbrick Smoke

OAK / White



**CARATTERISTICHE TECNICHE**

Technical features  
Caractéristiques techniques  
Technische Eigenschaften

**PAVIMENTO**

Floor tile

**RIVESTIMENTO**

Wall tile



Azienda  
Company



idea ceramica // by MoMa ceramiche Group

	Metodo di prova Testing method Méthode d'essai Prüfmethode	Valori prescritti International Standard Internationale Normwerte Valeurs Prescrites	Valori prescritti International Standard Internationale Normwerte Valeurs Prescrites	Valori medi Average Value Mittelwert Valeurs Moyennes
<b>Assorbimento d'acqua</b> Water absorption Absorption d'eau Wasseraufnahme	ISO 10545 - 3	≤ 0,5 %	> 10 %	<b>Conforme</b> In accordance Entsprechend
<b>Lunghezza e larghezza</b> Length and width Longueur et largeur Länge und Breite	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	<b>Conforme</b> In accordance Entsprechend
<b>Spessore</b> Thickness Épaisseur Stärke	ISO 10545 - 2	+/- 5 %	+/- 10 %	<b>Conforme</b> In accordance Entsprechend
<b>Rettilineità degli spigoli</b> Straightness Équerage des angles Geradlinigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,3 %	<b>Conforme</b> In accordance Entsprechend
<b>Ortogonalità</b> Rectangularity Orthogonalité Rechtwinkligkeit	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	<b>Conforme</b> In accordance Entsprechend
<b>Planarità</b> Warpage Planéité Ebenflächigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,5 % - 0,3%	<b>Conforme</b> In accordance Entsprechend
<b>Coefficiente di attrito (scivolosità)</b> Friction coefficient (slipperiness) Coefficient de friction (glissement) Reibungskoeffizient (Schlupfrigkeit)				
<b>Coefficiente dilatazione termica lineare</b> Coefficient of linear thermal-expansion Coefficient de dilatation thermique linéaire Lineare Wärmeausdehnung	ISO 10545 - 8	9 MK <sup>1</sup>		<b>7 MK<sup>1</sup></b>
<b>Resistenza alla flessione</b> Flexion resistance Résistance à la flexion Biegezugfestigkeit	ISO 10545 - 4	> 35 N/mm <sup>2</sup>	> 15 N/mm <sup>2</sup>	<b>Conforme</b> In accordance Entsprechend
<b>Resistenza all'abrasione profonda</b> Deep abrasion resistance Résistance à l'abrasion profonde Beständigkeit gegen Tiefenabrieb				
<b>Resistenza al gelo</b> Frost resistance Résistance au gel Frostwiderstandsfähigkeit	ISO 10545 - 12	Nessuna alterazione No alteration		<b>Conforme</b> In accordance Entsprechend
<b>Resistenza agli sbalzi termici</b> Thermal shock resistance Résistance aux écarts de température Temperaturwechselbeständigkeit	ISO 10545 - 9	Nessuna alterazione No alteration		<b>Conforme</b> In accordance Entsprechend
<b>Resistenza dei colori alla luce</b> Color resistance to light Résistance de la couleur à la lumière Lichtbeständigkeit	DIN 51094	Nessuna alterazione No alteration		<b>Conforme</b> In accordance Entsprechend
<b>Resistenza ai prodotti chimici</b> Chemical resistance Résistance aux produits chimiques Chemikalienfestigkeit	ISO 10545 - 13	Classe UB min	Classe GB min	<b>Conforme</b> In accordance Entsprechend
<b>Resistenza alle macchie</b> Stain resistance Résistance aux taches Flecken-Beständigkeit	ISO 10545 - 14	Classe 3 min	Classe 3 min	<b>Conforme</b> In accordance Entsprechend

**UNI EN 14411 G**  
**Gruppo BIa GL**  
Pavimenti in gres porcellanato  
Porcelain wall and floor tiles

**UNI EN 14411 L**  
**Gruppo BIII GL**  
Rivestimenti in bicottura  
Double firing wall tiles



**We are here!**  
**Noi siamo qui!**

**Finale Emila (MO) - Via Panaria Bassa 17/A - Italy**  
**Tel. +39 0535 90401 / info@ideaceramica.biz**  
**www.ideaceramica.net**



A detailed botanical illustration of various tropical plants, including large palm-like leaves with prominent veins and clusters of small, light-colored flowers. The style is reminiscent of a scientific or artistic study of flora, with a muted color palette of greens, browns, and greys.

idea ceramica

Via Panaria Bassa 17/A  
41034 Finale Emilia (MO)

Tel. +39 0535 90401  
Fax. +39 0535 762368

**MADE IN ITALY**

[info@ideaceramica.biz](mailto:info@ideaceramica.biz)

[www.ideaceramica.net](http://www.ideaceramica.net)